



SVG30/SVG83 (Twin Track)


STATICS



C



B




A


Panel Weight 250-350kg*
Reinforced Track & No Guarantee

350kg+* Not Recommended
No Guarantee


* Weights based on minimum recommended glass thickness

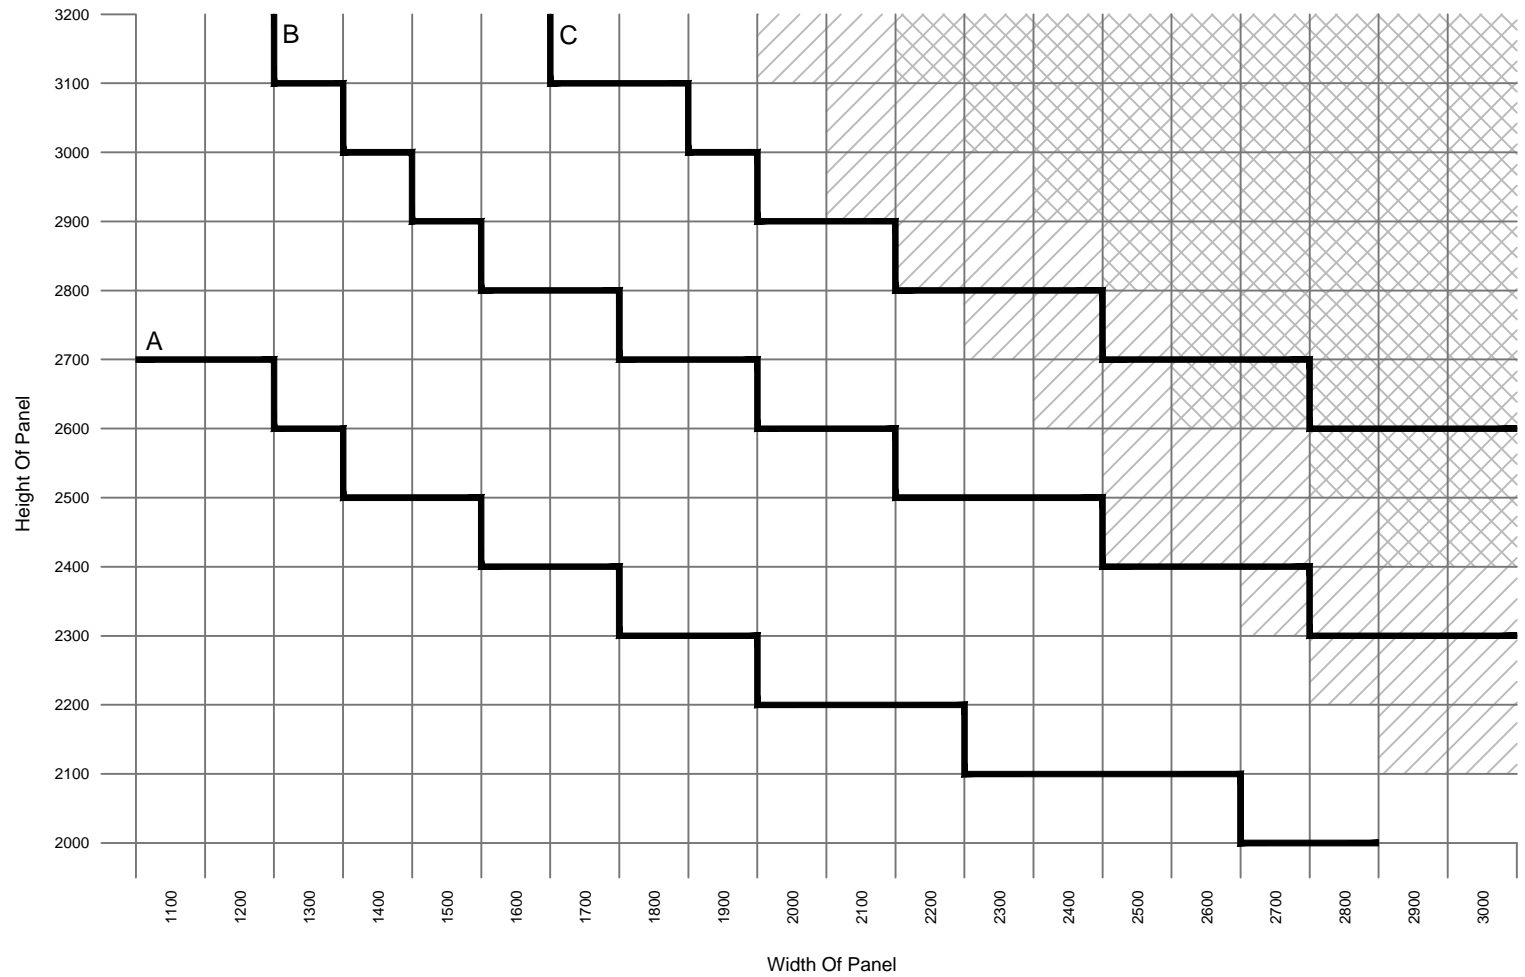


Sheltered Location 750Pa
(eg Central London Ground Floor)



C



B




A


Panel Weight 250-350kg*
Reinforced Track & No Guarantee

350kg+* Not Recommended
No Guarantee


* Weights based on minimum recommended glass thickness

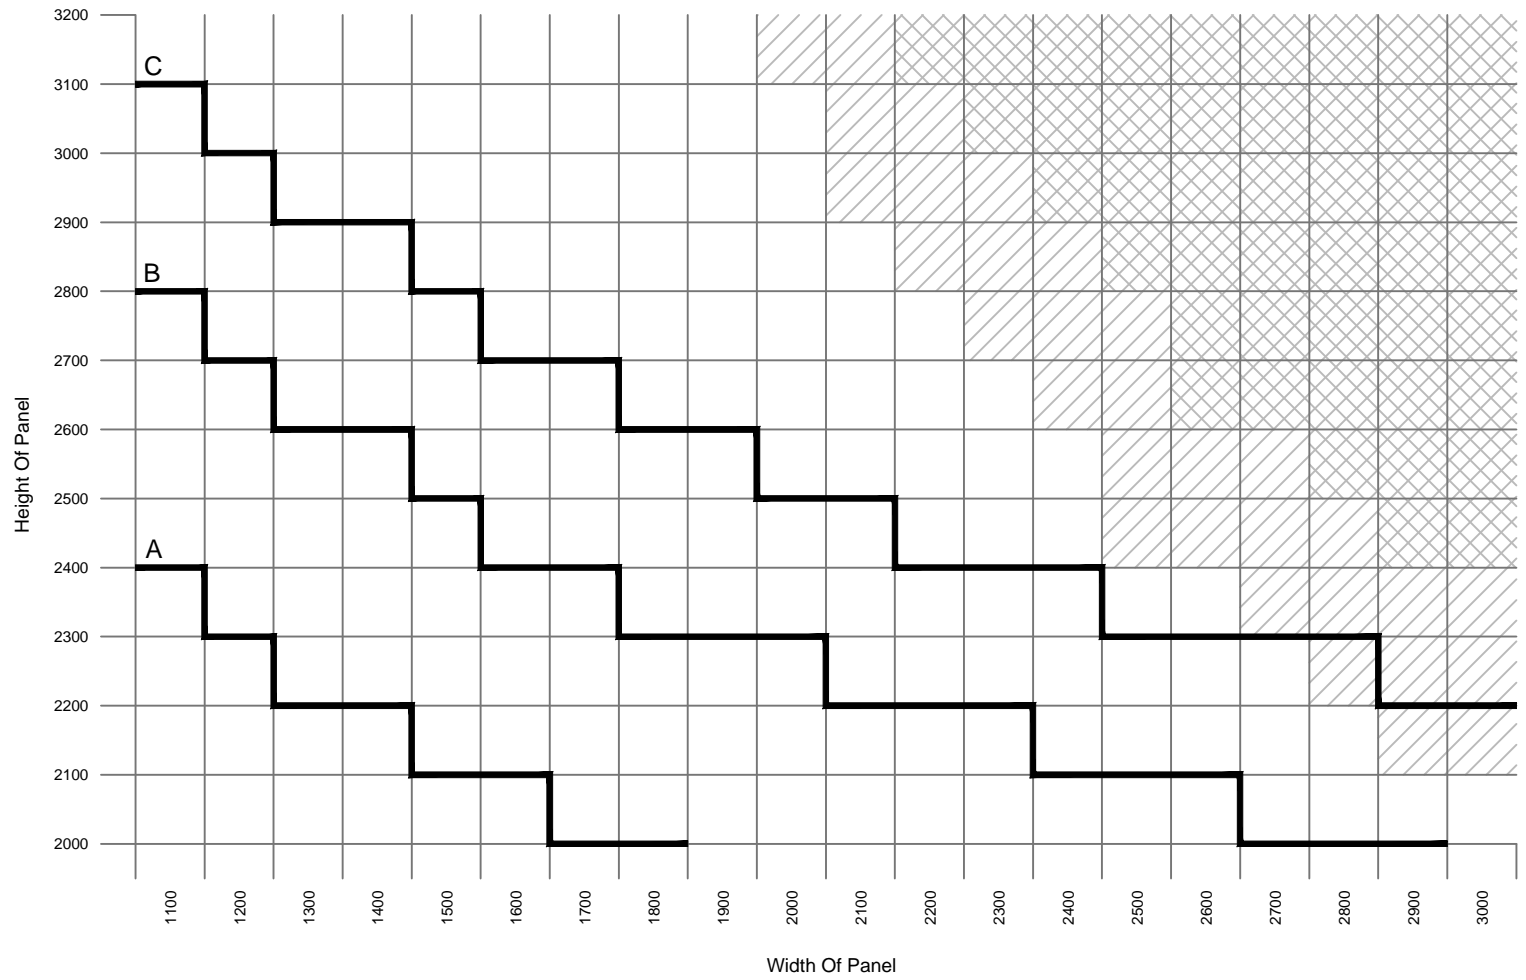



Rural Location 1200Pa
(eg North Yorkshire)




C





B

-  Panel Weight 250-350kg*
Reinforced Track & No Guarantee
-  350kg+* Not Recommended
No Guarantee




* Weights based on minimum recommended glass thickness

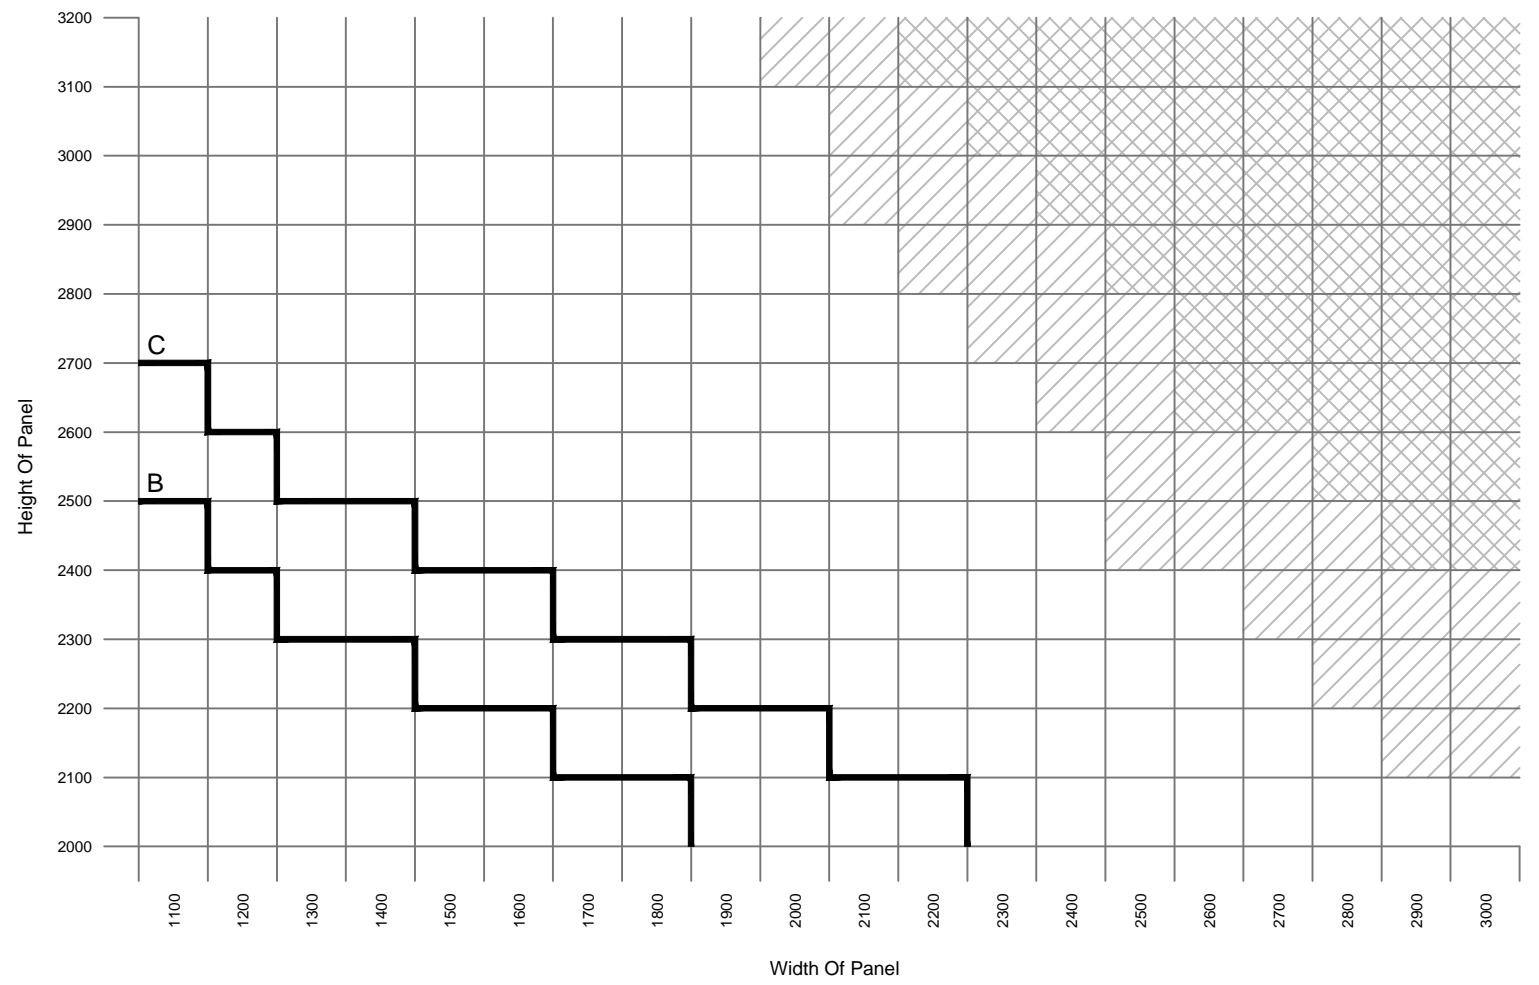

Fully Exposed Location 1700Pa
(eg Rural South Coast)

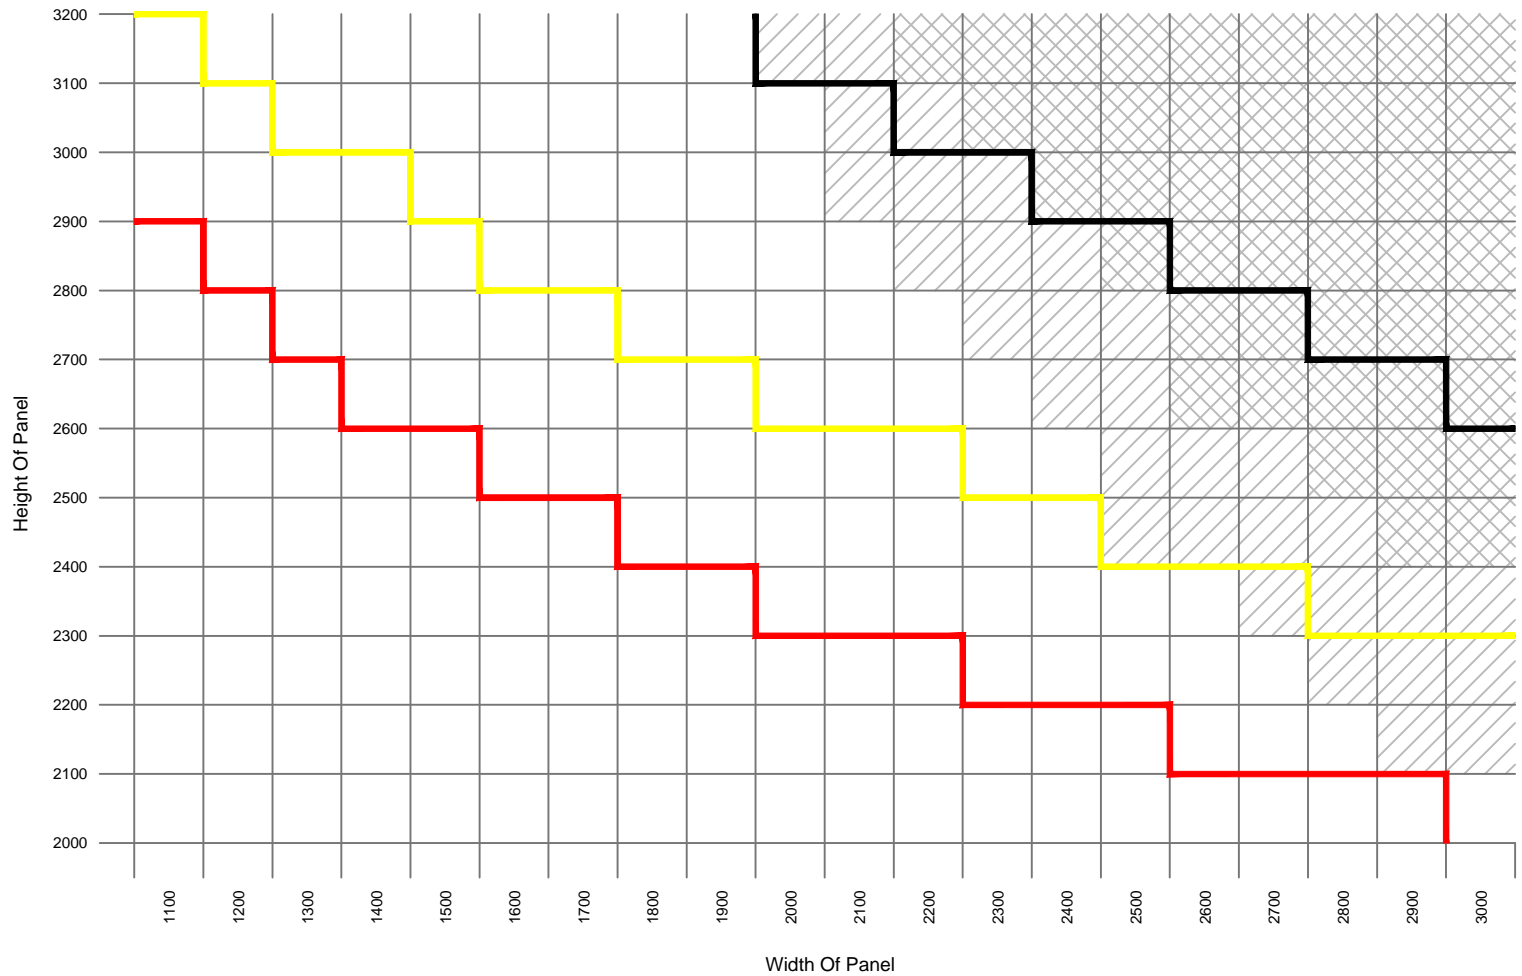







- Max. Panel Size @ 750pa
- Max. Panel Size @ 1200pa
- Max. Panel Size @ 1700pa
- Panel Weight 250-350kg
Reinforced Track & No Guarantee
- 350kg+ Not Recommended
No Guarantee

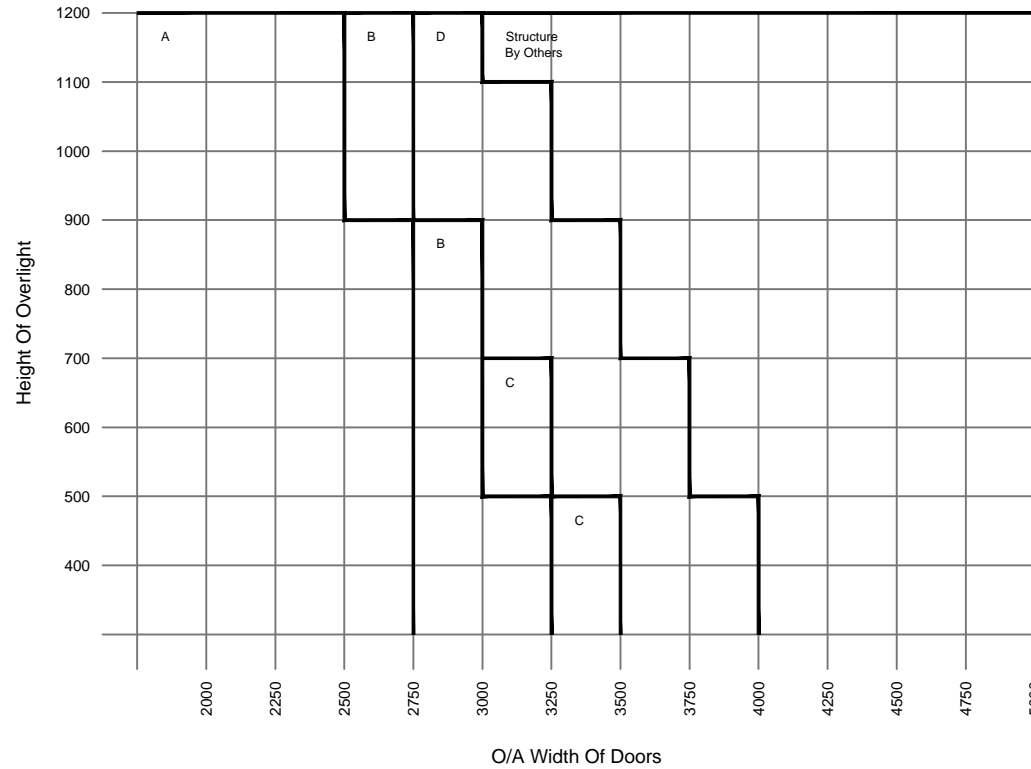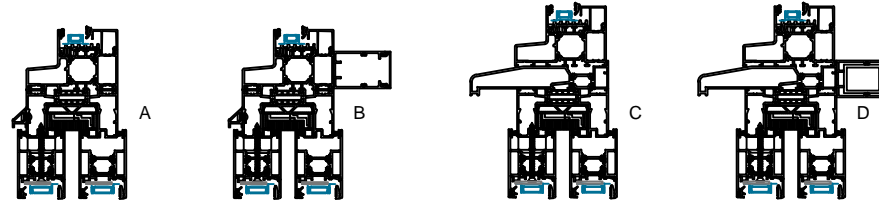

NOTE All calculations assume the following;
 Doors at maximum of 2500mm high.
 Glass in overlights to be maximum 6mm inner and outer panes.
 Openings assumed to be a ground level and not requiring to meet Part K for barrier loading.




If customers design falls outside parameters shown it may still be possible but will need to be confirmed by the Design Office.

Rural Location 1200Pa
 (eg North Yorkshire)

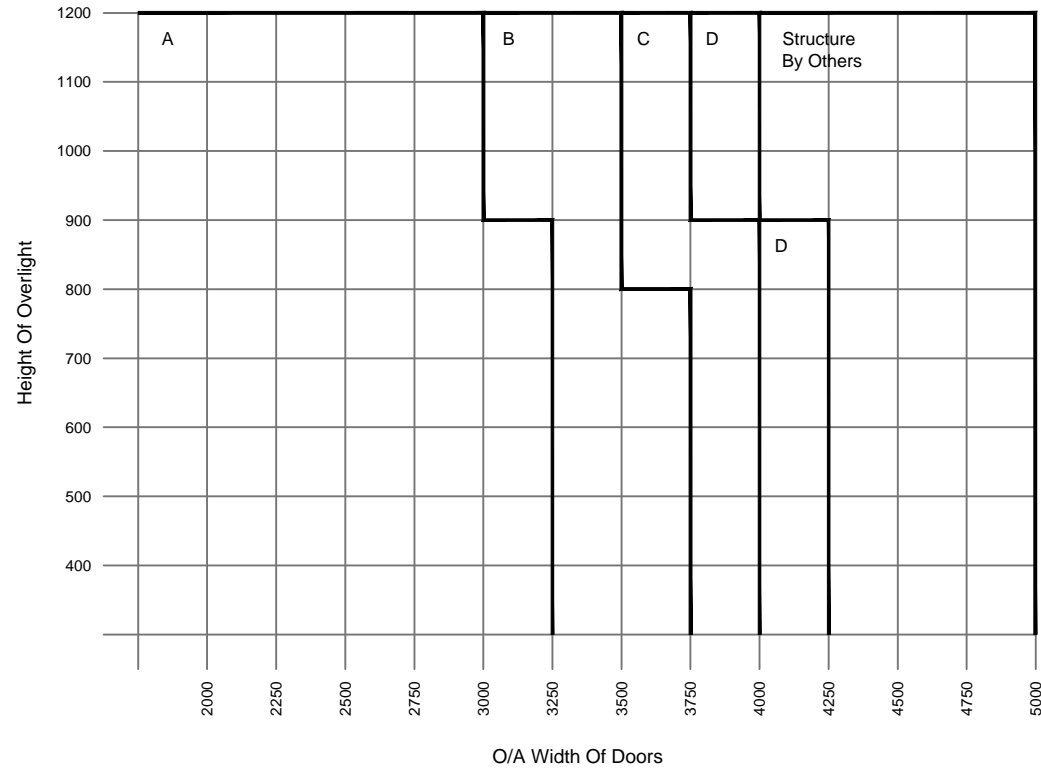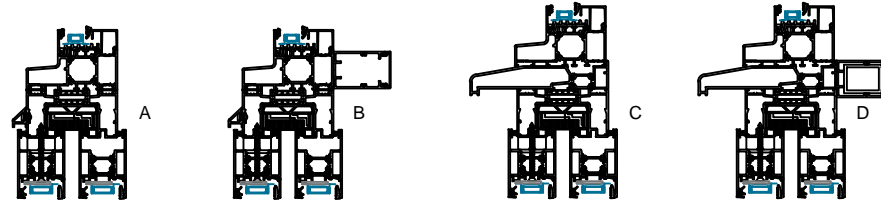

NOTE All calculations assume the following;
 Doors at maximum of 2500mm high.
 Glass in overlights to be maximum 6mm inner and outer panes.
 Openings assumed to be a ground level and not requiring to meet Part K for barrier loading.




If customers design falls outside parameters shown it may still be possible but will need to be confirmed by the Design Office.

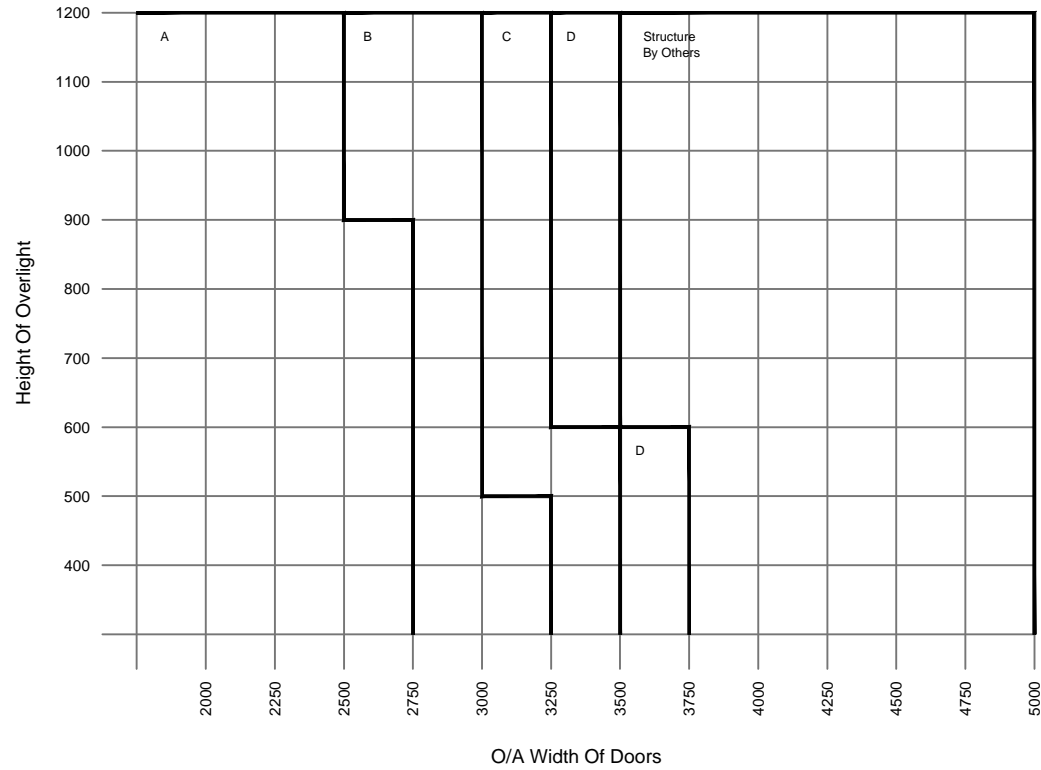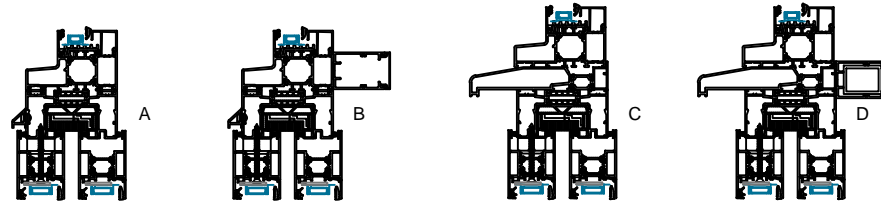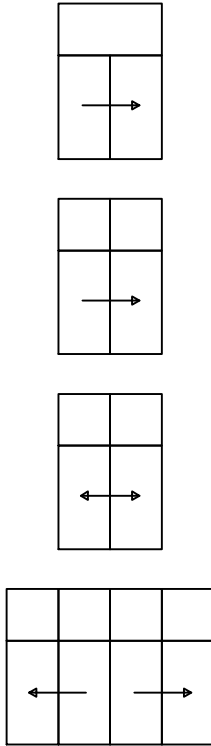

Rural Location 1200Pa
(eg North Yorkshire)

NOTE All calculations assume the following:
Doors at maximum of 2500mm high.
Glass in overlights to be maximum 6mm inner and outer panes.
Openings assumed to be a ground level and not requiring to meet Part K for barrier loading.

If customers design falls outside parameters shown it may still be possible but will need to be confirmed by the Design Office.

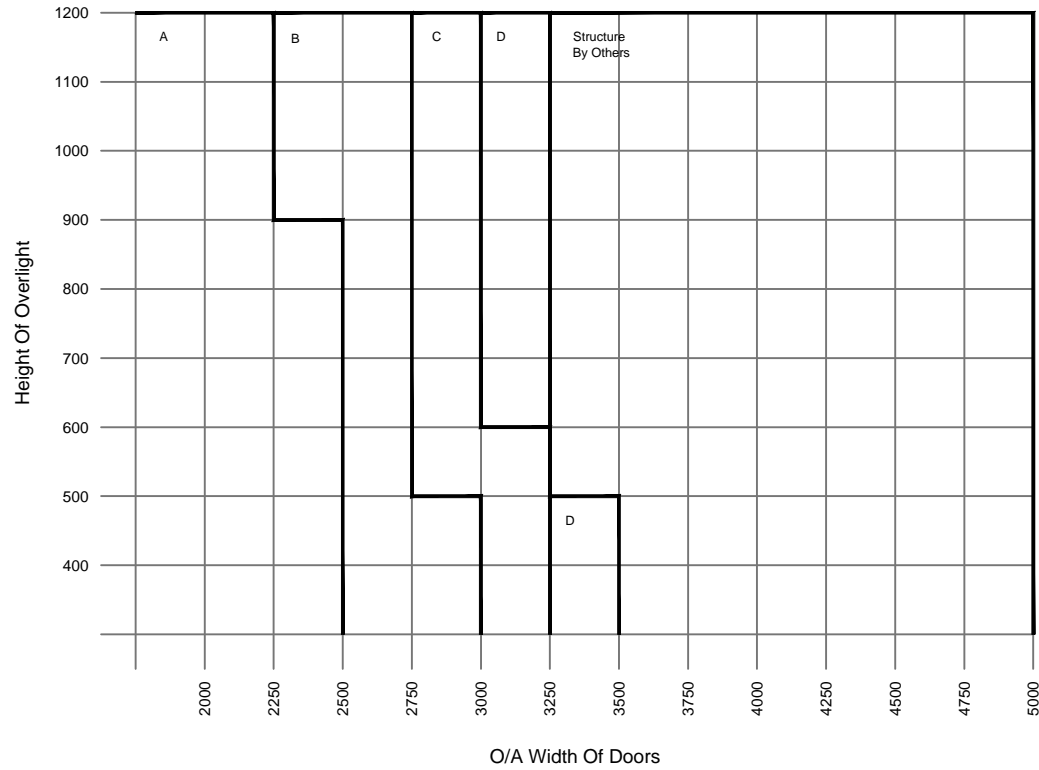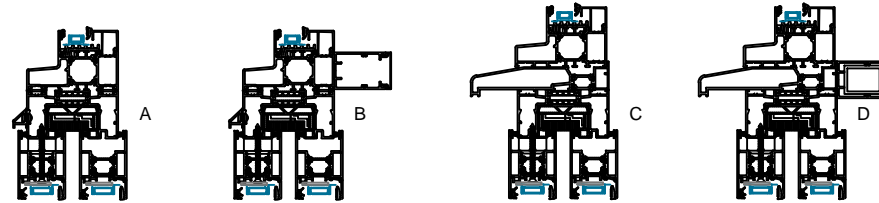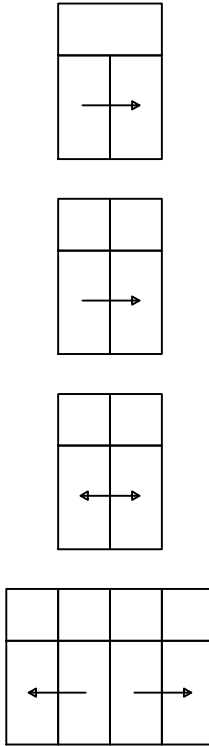

NOTE All calculations assume the following:
 Doors at maximum of 2500mm high.
 Glass in overlights to be maximum 6mm inner and outer panes.
 Openings assumed to be a ground level and not requiring to meet Part K for barrier loading.

If customers design falls outside parameters shown it may still be possible but will need to be confirmed by the Design Office.

Fully Exposed Location 1700Pa
 (eg Rural South Coast)